



## Ninja 250R / 2010

# Green for go

All the looks and style of a full-blown Ninja but designed for easy riding fun, the 250R is deservedly popular with a vast range of riders of varying skill levels from novices to those returning to biking.

**£ 4,099**

Price includes VAT at 17.5%,  
delivery to dealer and preparation of  
motorcycle. Government charges  
are charged in addition



Lime Green




Ebony

**Kawasaki**

# Features


Ninja 250R / 2010



Engine



Top-class supersport styling

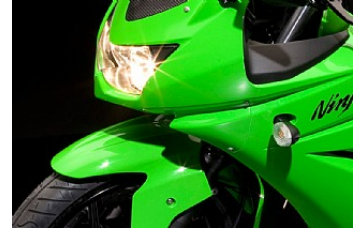

Big bike looks



Petal disc brakes



Ergonomics



Slim tail cowl

## More features



Exhaust system



Rider-friendly chassis



17" wheels and tyres




Aggressive dual headlights



Clear turn signals

# Accessories

Ninja 250R / 2010



BUBBLE SCREEN  
£ 66.95



PILLION SEAT COVER  
as from £ 94.95

WHEEL RIM TAPES (ONE  
WHEEL)  
£ 17.95

## More accessories



INDICATOR KIT FRONT  
£ 96.95



INDICATOR KIT REAR  
£ 83.95



RESISTOR KIT I  
£ 18.95



TANK PAD  
£ 19.95



BIKE COVER OUTDOOR  
£ 40.95



BIKE COVER INDOOR  
£ 30.95

M10 BOBBIN SET  
£ 17.95

# Specifications

Ninja 250R / 2010

## Engine

Engine type	Liquid-cooled, 4-stroke Parallel Twin
Displacement	249 cm <sup>3</sup>
Bore x stroke	62.0 x 41.2 mm
Compression ratio	11.6:1
Valve/Induction system	DOHC, 8 valves
Fuel system	Fuel injection: ø28 mm x 2 (Keihin)Dual throttle valves
Ignition	Digital
Starting	Electric
Lubrication	Forced lubrication, wet sump

## Transmission

Transmission	6-speed, return
Final Drive	Sealed chain
Primary reduction ratio	3.087 (71/23)
Gear ratios: 1st	2.600 (39/15)
Gear ratios: 2nd	1.789 (34/19)
Gear ratios: 3rd	1.409 (31/22)
Gear ratios: 4th	1.160 (29/25)
Gear ratios: 5th	1.000 (27/27)
Gear ratios: 6th	0.893 (25/28)
Final reduction ratio	3.071 (43/14)
Clutch	Wet multi-disc, manual

## Frame

Frame type	Tube diamond, steel
Rake/Trail	26° / 82 mm
Wheel travel, front	120 mm
Wheel travel, rear	130 mm
Tyre, front	110/70-17 M/C (54S)
Tyre, rear	130/70-17 M/C (62S)
Steering angle, left / right	35° / 35°

## Suspension

Suspension, front	37 mm telescopic fork
Suspension, rear	Bottom-Link Uni-Trak with gas-charged shock and 5-way adjustable preload

## Brakes

Brakes, front	Single 290 mm petal disc. Caliper: Single balanced actuation dual-piston.
Brakes, rear	Single 220 mm petal disc. Caliper: Dual-piston.

## Dimensions

Dimensions (L x W x H)	2,085 mm x 715 mm x 1,115 mm
Wheelbase	1,400 mm
Ground Clearance	135 mm
Seat height	790 mm
Fuel capacity	17 litres
Curb Mass	169 kg

## Performance

Maximum power	24 kW {33 PS} / 11,000 rpm
Maximum torque	22 N·m {2.24 kgf·m} / 8,200 rpm